


INSTALLATION SHEET

Radiant Heat Under or Between Wood Joists

PRODUCT: Double Bubble Foil/Foil Insulation

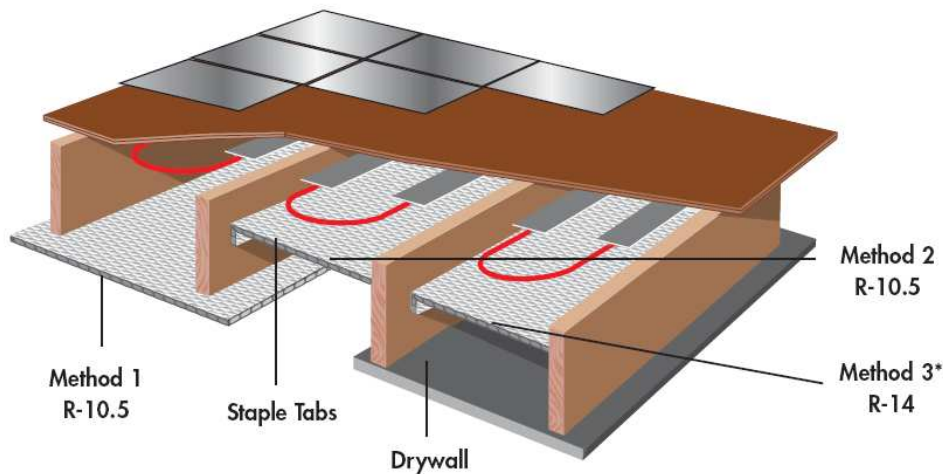

Benefits:

- Quick, clean and easy to install
- Reduces Radiant Heat loss/gain and adds R-Value
- Increases heating system efficiency
- Excellent Vapor Barrier
- Helps radiate heat in required direction

Installation Method: 1

1. Unroll and staple 48" wide Double Bubble Foil/Foil under the floor joists.
2. Seal the seams and perimeter using Reflective Foil Tape.

Installation Method: 2

1. Using 16" wide pre-cut Double Bubble Foil/Foil Insulation with Staple Tabs, insert the material between joists 2" to 4" below heating coils or per manufacturer instructions.
2. Staple to sides of joists.
3. Seal ends using Reflective Foil Tape.
4. Install drywall if desires.